FAVEN
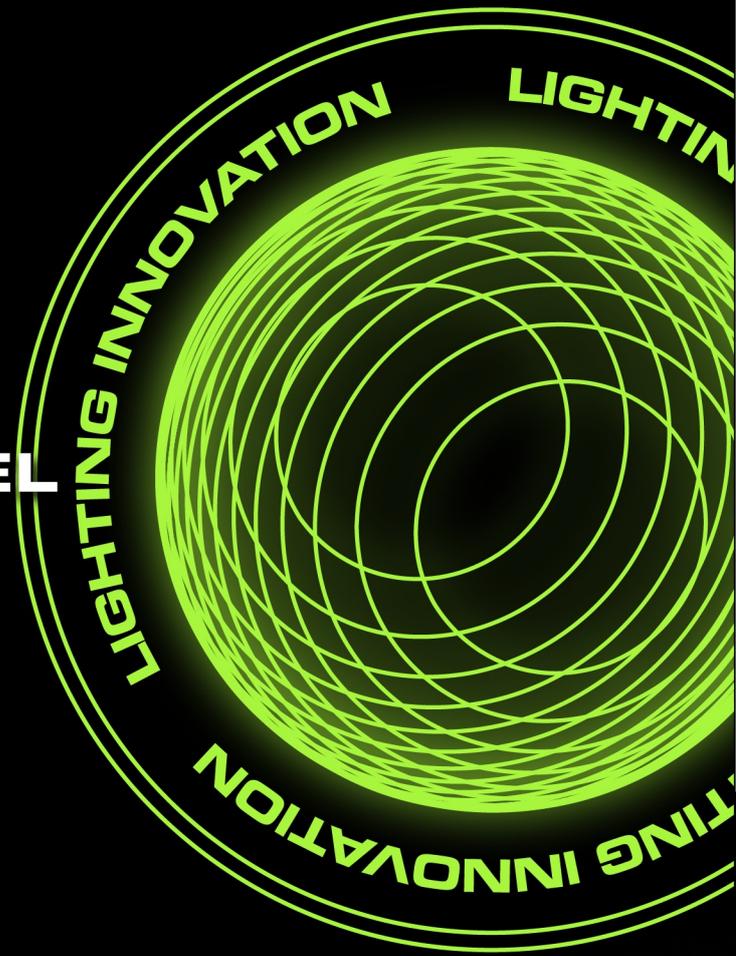
CHROMA

- → **120W + 15W FAR RED LED UNDER CANOPY LIGHT**
- → **INDEPENDENT FAR RED CHANNEL**
- → **ADJUSTABLE SPECTRUM R4-R9 RED & WHITE**

LIGHTING INNOVATION LIGHTING INNOVATION

CHROMA BY FAVEN

XX

TECHNICAL SPECIFICATIONS

AMPS	DAISY-CHAIN MAX # CONNECTED	VOLTAGE
1.0	10	120
0.5	17	240
0.43	20	277
0.25	35	480

FAVEN

- → **120W + 15W FAR RED DIMMABLE LED FIXTURE**
- → **INDEPENDENT FAR RED CHANNEL**
- → **ADJUSTABLE SPECTRUM R4-R9 RED & WHITE**
- → **IP66 RATING**
- → **5YR WARRANTY**

PPE (MOL/J)	up to 2.9
PPF (MOL/S)	up to 380
INPUT POWER	120 W
INPUT CURRENT	1.0A 0.5A 0.43A 0.25A
FREQUENCY	5-/60HZ
FIXTURE DIMENSIONS	45.6"L x 2.9"W x 3.3"H 11.57CM* 7.5CM* 8.5CM
WEIGHT	5.72LB / 2.6KG
THERMAL MANAGEMENT	PASSIVE
OPERATION TEMPERATURE	95˚F/35˚C MAX
LIGHT DISTRIBUTION	120˚
DIMMING	40% - 100% OFF
LIFETIME	>50000 HRS

ADJUSTABLE STANDS 8", 10", 12"

SEAMLESS CONNECTION

CE IP66

ETL LISTED c us
Intertek 4009588

DLC HORT LISTED™

CE

ADJUSTABLE SPECTRUM

R9
µmol/s/nm

380   480   580   680   780

R8
µmol/s/nm

380   480   580   680   780

R7
µmol/s/nm

380   480   580   680   780

R6
µmol/s/nm

380   480   580   680   780

R5
µmol/s/nm

380   480   580   680   780

R4
µmol/s/nm

380   480   580   680   780
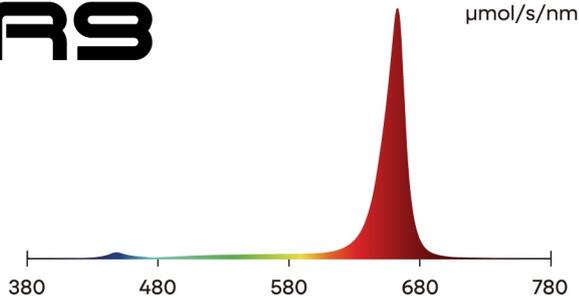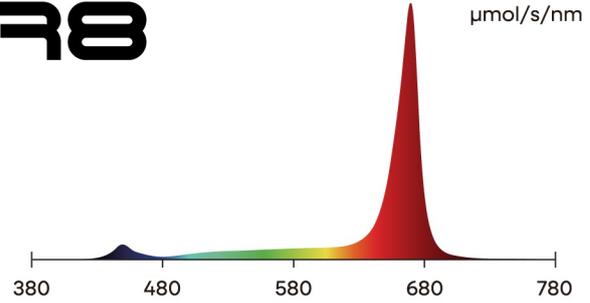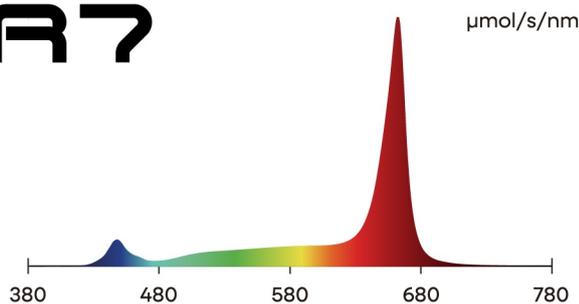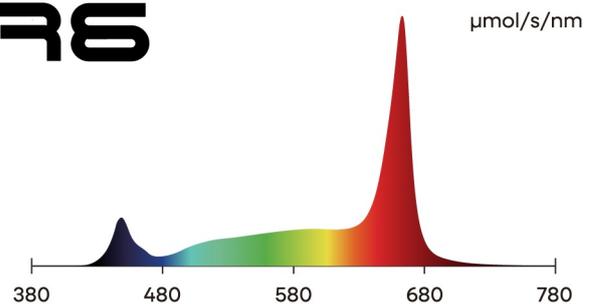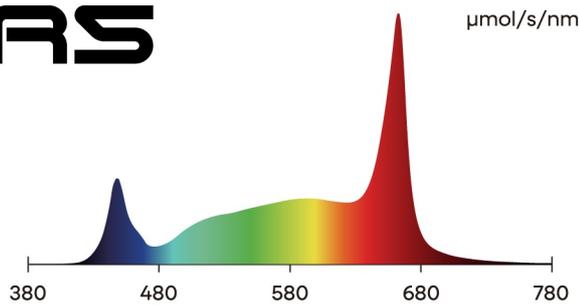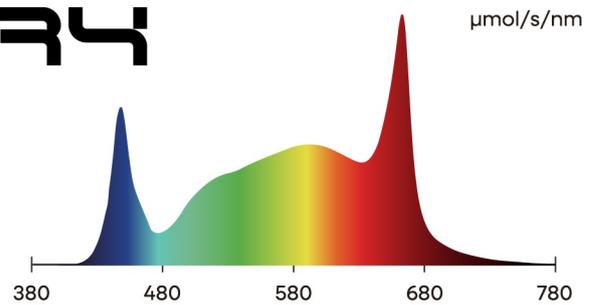
INDEPENDENT
FAR RED
CHANNEL

Designed to run independently or
in addition to any spectrum.

FR
µmol/s/nm

380   480   580   680   780
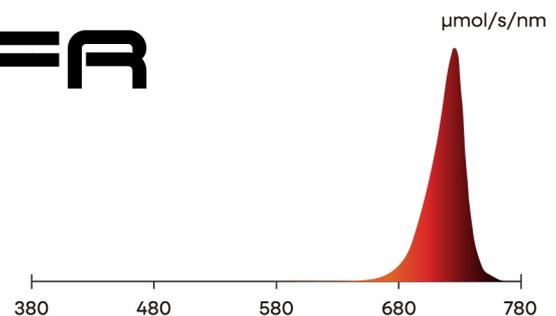
SALES AND
INQUIRIES:
sales@favenlighting.com

TECHNICAL
SUPPORT:
support@favenlighting.com

YOUTUBE +
INSTAGRAM:
@favenlighting

info@favenlighting.com   favenlighting.com